


### Solenoid operated poppet valve cartridge

- ◆ solenoid actuated
- ◆ direct operated
- ◆ 3/2-way
- ◆  $Q_{max} = 10 \text{ l/min}$
- ◆  $p_{max} = 350 \text{ bar}$
- ◆ low power

**M22 x 1,5**  
**ISO 7789**

- ⊕ II 2 G Ex db IIC T6, T4
  - ⊕ II 2 D Ex tb III C T80 °C, T130 °C
  - ⊕ I M2 Ex db I Mb
- Class I Division 1  
 Class I Zone 1



### DESCRIPTION

Direct operated 3/2-way solenoid poppet valve in screw-in cartridge construction for cavity according to ISO 7789. By means of the pressure tight switching solenoid, the pressure compensated, metallically sealing poppet spool is either opened or closed. The seat spool guide is sealed by means of an O-ring. The pressure tight encapsulated Ex-protection solenoid coil prevents an explosion on the inside penetrating to the outside as well as an ignitable surface temperature.

### CERTIFICATES

	Surface	Mining	Standard -25°C to...
ATEX	x	x	x
IECEX	x	x	x
CCC	x	x	x
EAC	x	x	x
Australia	x	x	x

The certificates can be found on [www.wandfluh.com](http://www.wandfluh.com)

### APPLICATION

These valves are suitable for applications in explosion-hazard areas, open cast and also in mines. Poppet valves are used where tight closing functions of the valve are essential like leakage-free load holding, clamping or gripping. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

### SYMBOL

FG



### TYPE CODE

Poppet valve		S L Y PM22 - FG - <input type="text"/> / <input type="text"/> <input type="text"/> - <input type="text"/> # <input type="text"/>	
Direct operated, Low wattage			
Ex-protection execution, Exd			
Screw-in cartridge M22 x 1,5			
Designation of symbols			
Nominal voltage $U_N$	24 VDC	<input type="text"/>	
Nominal power $P_N$	6 W	<input type="text"/>	Holding power 4 W
	6 W	<input type="text"/>	
Certification	ATEX, IECEX, EAC, CCC	<input type="text"/>	
	Australia	<input type="text"/>	
Sealing material	NBR	<input type="text"/>	
	FKM (Viton)	<input type="text"/>	
Design index (subject to change)			

1.11-2066

## GENERAL SPECIFICATIONS

Designation	3/2-way poppet valve
Construction	Direct operated
Mounting	Screw-in cartridge construction
Nominal size	M22 x 1,5 according to ISO 7789
Actuation	Ex-protection switching solenoid
Ambient temperature	<b>Operation as T4</b> -25...+70 °C (L6, L6R4T4)
Weight	2,30 kg (3/2-way)
MTTFd	150 years

## HYDRAULIC SPECIFICATIONS

Working pressure	$p_{max} = 350$ bar
Maximum volume flow	$Q_{max} = 10$ l/min, see characteristics
Nominal volume flow	$Q_N = 10$ l/min
Leakage oil	Seat tight, max. 0,15 ml / min (approx. 3 drops / min) at 30 cSt
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm <sup>2</sup> /s...320 mm <sup>2</sup> /s
Temperature range fluid	NBR -25...+70 °C FKM (D1) -20...+70 °C
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{6...10} \geq 75$ , see data sheet 1.0-50

## ELECTRICAL SPECIFICATIONS

Protection class	IP65 / 66 / 67
Relative duty factor	100 % DF
Switching frequency	5'000 / h
Voltage tolerance	$\pm 10$ % with regard to nominal voltage
Standard nominal voltage	24 VDC
Standard nominal power	6 W 6 W with 4 W holding power (electronic power reduction)
Temperature class	Nominal power 6 W: T1...T4

**Note!** Other electrical specifications see data sheet 1.1-183



## ACTUATION

Actuation	Switching solenoid, wet pin push type, pressure tight
Execution	MKY45 / 18x60 (Data sheet 1.1-183)
Connection	Cable gland for cable $\varnothing 6,5...14$ mm

## SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

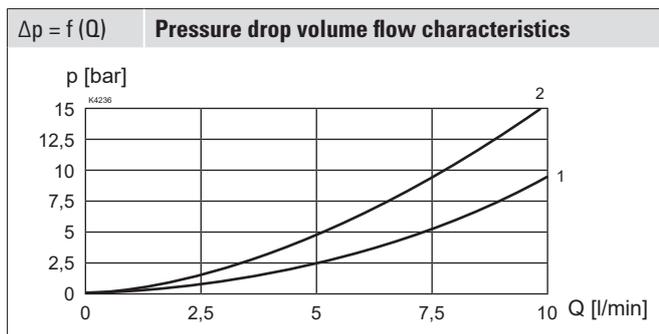
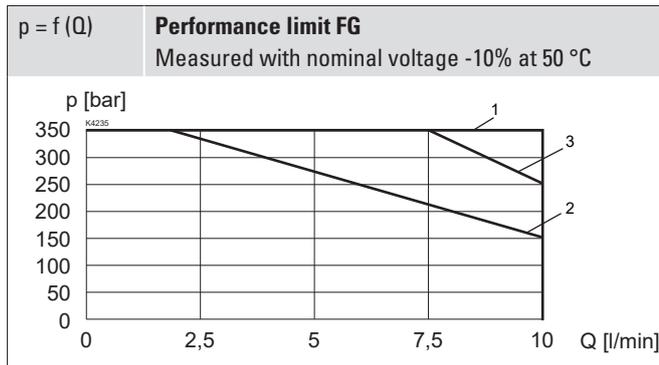
## SURFACE TREATMENT

- ◆ The cartridge body, the slip-on coil and the armature tube are zinc-nickel coated

## STANDARDS

Cartridge cavity	ISO 7789
Explosion protection	Directive 2014 / 34 / EU (ATEX)
Flameproof enclosure	EN / IEC / UL 60079-1, 31
Cable entry	EN 60079-0, 1, 7, 15, 31
Protection class	EN 60 529
Contamination efficiency	ISO 4406

**PERFORMANCE SPECIFICATIONS**

 Oil viscosity  $\nu = 30 \text{ mm}^2/\text{s}$ 


	1 → 2	2 → 1	2 → 3	3 → 2
SLYPM22-FG	3	1	1	2

	1 → 2	2 → 1	2 → 3	3 → 2
SLYPM22-FG	1	1	2	2

**MANUAL OVERRIDE**

Screw plug (HB0), no actuation possible.

Optionally HN (K) or HR (K)

→ See data sheet 1.1-311

**ACCESSORIES**

Threaded body	Data sheet 2.9-2xx
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50
Relative duty factor	Data sheet 1.1-430

**COMMISSIONING**

**Attention!** When commissioning, the valve must be vented under pressure (max. two rotations of screw E).



The solenoid coil must only be put into operation, if the requirements of the operating instructions supplied are observed to their full extent. In case of non-observance, no liability is assumed.

**INSTALLATION NOTES**

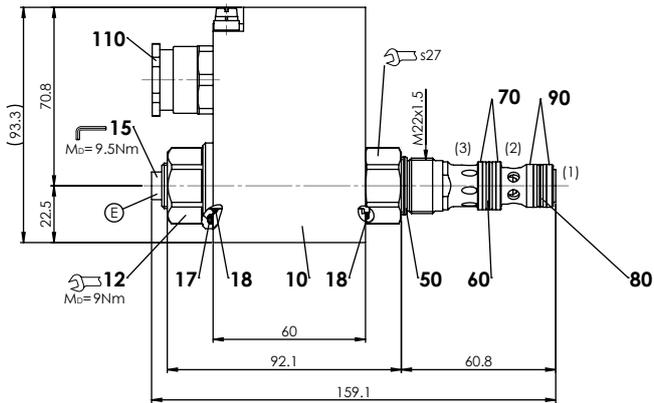
Mounting type	Screw-in cartridge M22 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 60 \text{ Nm}$ Screw-in cartridge $M_D = 9 \text{ Nm}$ knurled nut $M_D = 9,5 \text{ Nm}$ HB0 $M_D = 5,5 \text{ Nm}$ HB4,5

**Attention!** For stack assembly please observe the remarks in the operating instructions




**DIMENSIONS**

SLYPM22-FG


**HYDRAULIC CONNECTION**

Cavity drawing according to ISO 7789-22-04-0-98


**Note!**


For detailed cavity drawing and cavity tools see data sheet 2.13-1004

**PARTS LIST**

Position	Article	Description
10	263.6...	Solenoid coil MK.45 / 18 x 60
12	154.2603	Knurled nut Ex M18 x 1,5 x 18
15	239.2033	Screw plug HB0 (incl. seal)
110	111.1080	Cable gland M20 x 1,5
-	251.3040	Seal kit SDYPM22
-	251.3023	Seal kit SDYPM22-D1

**Seal kit consisting of:**

17	O-ring	ID 25,07 x 2,62
18	O-ring	ID 17,17 x 1,78
50	O-ring	ID 18,77 x 1,78
60	O-ring	ID 15,60 x 1,78
70	B-up ring	PTFE rd 16,1 x 19 x 1,4
80	O-ring	ID 14,00 x 1,78
90	B-up ring	PTFE rd 14,1 x 17 x 1,4