

Spool valve


Flange construction

- ◆ hand operated
- ◆ 4/3-way with spring centred mid position
- ◆ 4/2-way with spring reset
- ◆ 4/2- and 4/3-way detented
- ◆ $Q_{max} = 20$ l/min
- ◆ $p_{max} = 350$ bar

DESCRIPTION

Direct operated spool valve, hand operated with 4 connections in 5 chamber design. Spool detented or with spring. Without actuation, the spool is held in the center position by the spring (4/3), or switched back to the offset position (4/2). With the detent, the spool is held in the last switching position selected. Precise spool fit, low leakage, long service life time. Spool made from hardened steel, body from high quality hydraulic cast steel.

NG4-Mini



APPLICATION

Spool valves are mainly used for controlling direction of movement and stopping of hydraulic cylinders and motors. The direction of movement is determined by the position of the spool and its symbol. Manually or mechanically operated valves are particularly suitable for use in installations where no electric current is available or for applications in explosion hazard areas. Miniature valves are used where both, reduced dimensions and weight are important.

TYPE CODE

Mounting interface acc. to Wandfluh standard		B	H	4	/		-		#	
Hand lever										
Number of control ports										
Designation of symbols acc. to table	Operation a-side									
	Operation b-side									
Hand lever with spring reset or spring centred										
	Hand lever detented									
Sealing material	NBR									
	FKM (Viton)									
Design index (subject to change)										

1.5-20

GENERAL SPECIFICATIONS


Designation	4/2-, 4/3-spool valve
Construction	Direct operated
Mounting	Flange construction
Nominal size	NG4-Mini according to Wandfluh standard
Actuation	Hand operated
Ambient temperature	-25...+70 °C
Weight	0,87 kg
MTTFd	150 years

HYDRAULIC SPECIFICATIONS


Working pressure	$p_{max} = 350$ bar
Tank pressure	$p_{Tmax} = 100$ bar
Maximum volume flow	$Q_{max} = 20$ l/min, see characteristics
Leakage oil	See characteristics
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm ² /s...320 mm ² /s
Temperature range fluid	-25...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 20 / 18 / 14
Filtration	Required filtration grade $\beta_{10...16} \geq 75$, see data sheet 1.0-50

SINNBILD




Overview valves

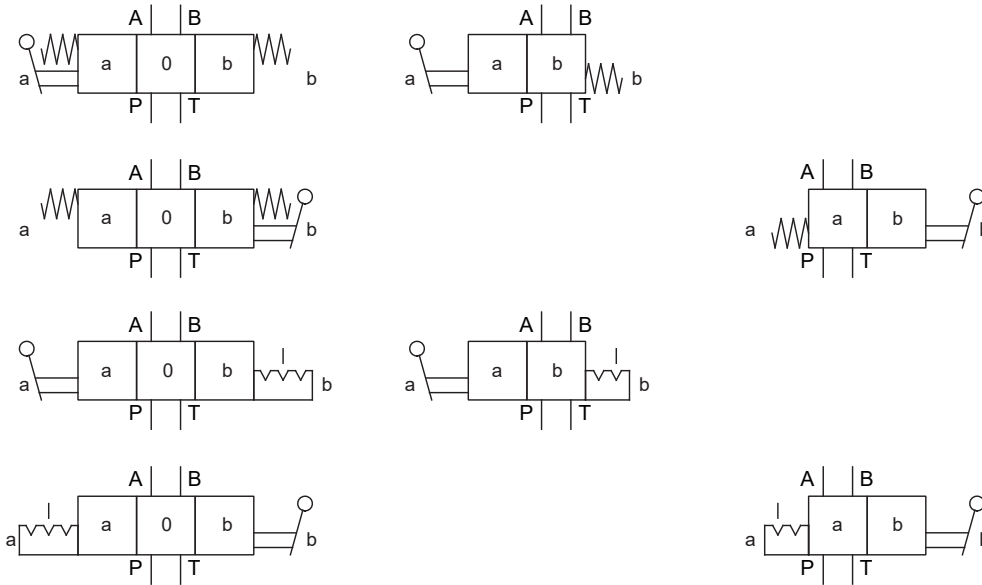

Overview spool types

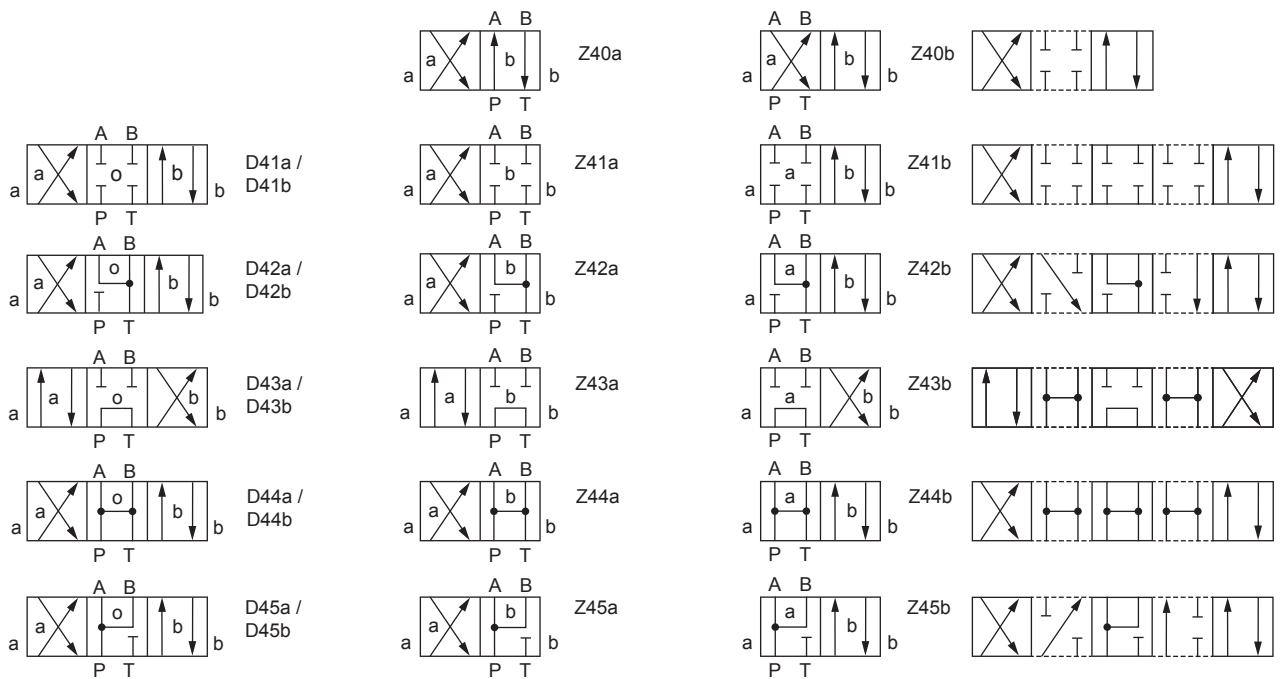


PERFORMANCE SPECIFICATIONS

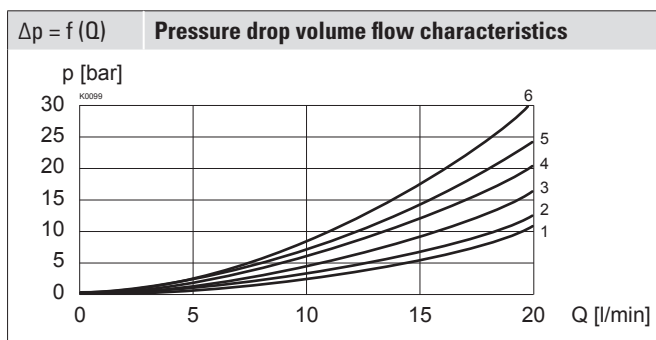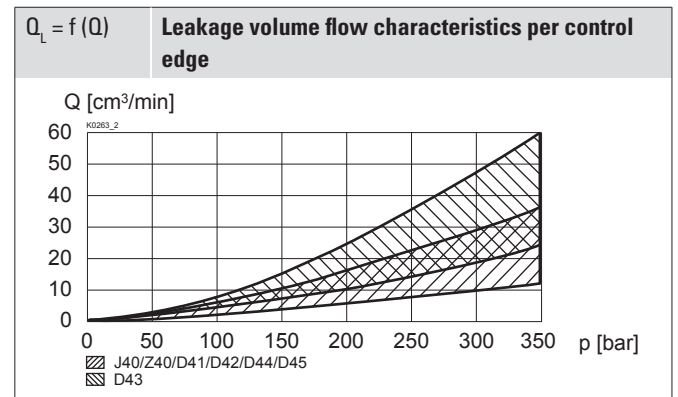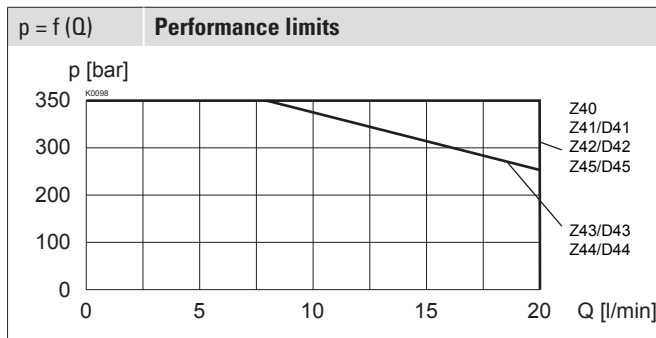 Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$



Symbol	Volume flow direction				
	P - A	P - B	P - T	A - T	B - T
Z40	5	5	-	2	2
D41 / Z41	5	5	-	2	2
D42 / Z42	5	5	-	2	2
D43 / Z43	4	4	6	1	1
D44 / Z44	4	4	3	1	1
D45 / Z45	4	4	-	2	2

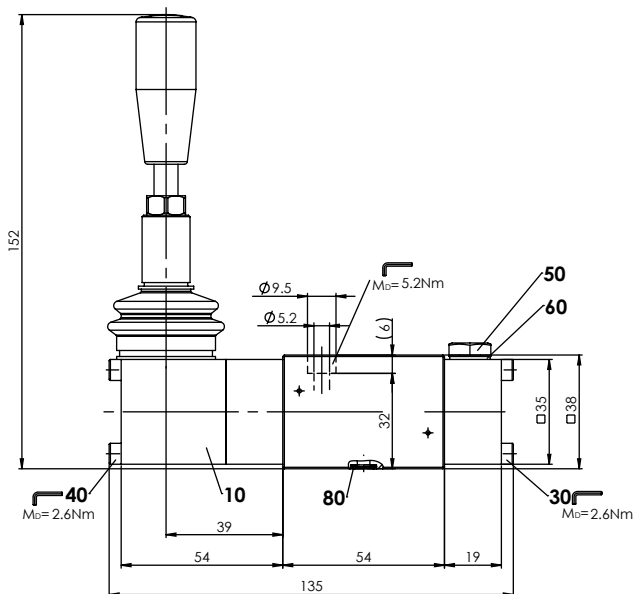DIMENSIONS



PARTS LIST


Position	Article	Description
10	253.2000	Hand control head BHII
30	246.1126	Socket head screw M4 x 25 DIN 912
40	246.1161	Socket head screw M4 x 60 DIN 912
50	238.1100	Screw plug M10 x 1 DIN 7604A
	239.1102	Screw plug
60	049.1100	Copper seal ring NG10 x 13.5 x 1.4 DIN7603
80	160.2052	O-ring ID 5,28 x 1,78 (NBR)

Note!  Screw plug 238.0201 for spring centred execution
 Screw plug 239.2000 for detented execution
 Pos. 60 only for screw plug 239.2000

ACTUATION

Actuation	Hand lever
Actuation angle	$\alpha_b = 5,7^\circ / \text{side}$
Actuation force	$F_b = 15 - 20 \text{ N}$

HYDRAULIC CONNECTION



SEALING MATERIAL

NBR or FKM (Viton) as standard, choice in the type code

INSTALLATION NOTES

Mounting type	Flange mounting 3 fixing holes for socket head screws M5 x 40
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 5,2 \text{ Nm}$ (screw quality 8.8, zinc coated) Fixing screws

Note!



The length of the fixing screw depends on the base material of the connection element.

ACCESSORIES

Fixing screws	Data sheet 1.0-60
Threaded subplates	Data sheet 2.9-10
Multi-station subplates	Data sheet 2.9-50
Horizontal mounting blocks	Data sheet 2.9-90
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50

STANDARDS

Mounting interface	Wandfluh standard
Contamination efficiency	ISO 4406

SURFACE TREATMENT

- ◆ The valve body, the hand lever housing and the cover are zinc-nickel coated