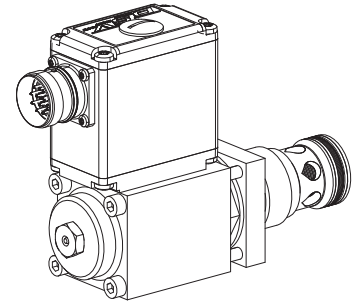


**Proportional throttle valve
Screw-in cartridge construction**

- **Integrated electronics**
- **Direct operated, not pressure compensated**
- **Q_{max} = 65 l/min**
- **Q_{N max} = 63 l/min**
- **p_{max} = 250 bar**

M33x2
 ISO 7789

DESCRIPTION

Direct operated proportional throttle valve with integrated electronics as a screw-in cartridge with a thread M33x2 for cavity acc. to ISO 7789. These plug & play valves are factory set and adjusted. High valve-to-valve reproducibility. Housing for electronics with protection class IP67 for harsh environment. The volume flow is adjusted by a Wandfluh-proportional solenoid (VDE standard 0580). The cartridge body is made of steel. Its special surface coating protects the outside against corrosion and reduces friction of the control spool. The solenoid is zinc coated.

FUNCTION

Proportionally to the command signal applied to the electronics spool stroke, metering opening and volume flow increase. The control connection is provided by an analog interface or a fieldbus interface (CANopen or Profibus DP). Parameter setting and diagnosis with the free-of-charge software «PASO» or via fieldbus interface. After taking off the cover of the electronic housing, the serial interface to adjust the settings is accessible. The menu controlled Windows program «PASO» allows easy adjustment of all variable settings. Data are stored in a non-volatile memory. Even after an electric power failure settings can easily be reproduced and transmitted.

APPLICATION

Proportional throttle valves with integrated electronics are well suited for demanding applications where high resolution, high volume flow and low hysteresis are requested. They are implemented in systems calling for good valve-to-valve reproducibility, easy installation, comfortable operation and high precision in industrial hydraulics as well as in mobile hydraulics. The proportional throttle cartridge is very suitable for mounting in control blocks, flange bodies and sandwich plates of the size NG10. Cavity tools are available for machining the cavities in steel and aluminium (hire or purchase). Please refer to the data sheets in register 2.13.

CONTENT

GENERAL SPECIFICATIONS.....	1
SYMBOL.....	1
HYDRAULIC SPECIFICATIONS.....	2
ELECTRICAL SPECIFICATIONS.....	2
START-UP.....	2
CONNECTOR WIRING DIAGRAM.....	2
CHARACTERISTICS.....	3
DIMENSIONS/ SECTIONAL DRAWINGS.....	3-4
PARTS LIST.....	4
ACCESSORIES (not included).....	4

TYPE CODE


	D	N	V	PM33	-		-		#	
Throttle valve										
Normally closed										
Proportional valve with integrated electronics										
Screw-in cartridge M33x2										
Nominal volume flow rates:										
Q _N = 63 l/min									63	
Q _N = 32 l/min									32	
Standard nominal voltage U _N :										
12 VDC									12	
24 VDC									24	
Hardware configuration:										
With analog signal (0...+10 V factory set)										A1
With CANopen acc. to DSP-408										C1
With Profibus DP in accordance with Fluid Power Technology										P1
With CAN J1939 (on request)										J1
Design-Index (Subject to change)										

GENERAL SPECIFICATIONS

Description	Direct operated proportional throttle valve with integrated electronics
Construction	Screw-in cartridge for cavity acc. to ISO 7789
Operations	Proportional solenoid
Mounting	Screw-in thread M33x2
Ambient temperature	-20...+65 °C (typical) (The upper temperature limit is a guideline value for typical applications, in individual cases it may also be higher or lower. The electronics of the valve limit the power in case of a too high electronics temperature. More detailed information can be obtained from the operating instructions «DSV».)
Mounting position	any
Fastening torque	M _D = 80 Nm for screw-in cartridge M _D = 5,2 Nm (qual. 8.8) for solenoid screws
Weight	m = 1,5 kg
Flow direction	1 → 2

SYMBOL

«normally closed»



HYDRAULIC SPECIFICATIONS

Fluid	Mineral oil, other fluids on request
Contamination efficiency	ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) refer to data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70 °C
Peak pressure	$p_{max} = 250$ bar
Nominal volume flow rates	$Q_N = 63$ l/min $Q_N = 32$ l/min
Max. volume flow	$Q_{max} = 65$ l/min
Leakage volume flow	on request
Hysteresis	≤ 8 %

ELECTRICAL SPECIFICATIONS

Protection class	IP 67 acc. to EN 60 529 with suitable connector and closed electronics housing
Supply voltage	12 VDC or 24 VDC
Ramps	adjustable
Parameterisation	via fieldbus or USB
Interface	USB (Mini B) for parameterisation with «PASO» (under the closing screw of the housing cover, factory set parameters)

Analog interface:

Device receptacle (male)	M23, 12-poles
Mating connector	Plug (female), M23, 12-poles (not incl. in delivery)
Preset value signal	Voltage/Current

Fieldbus interface:

Device receptacle supply (male)	M12, 4-poles
Mating connector	Plug (female), M12, 4-poles (not incl. in delivery)
Device receptacle CANopen (male)	M12, 5-poles (acc. to DRP 303-1)
Mating connector	Plug (female), M12, 5-poles (not incl. in delivery)
Device receptacle Profibus (female)	M12, 5-poles, B-coded (acc. to IEC 947-5-2)
Mating connector	Plug (male), M12, 5-poles, B-coded (not incl. in delivery)
Preset value signal	Fieldbus


NOTE!


Detailed electrical characteristics and description of «DSV» electronics are shown on data sheet 1.13-75.

START-UP

Normally there is no need to adjust settings by the customer. The connector has to be wired according to the chapter «Connector wiring diagram».

Additional information can be found on our website:
 «www.wandfluh.com»

Free-of-charge download of the «PASO»-software and the instruction manual for the «DSV» hydraulic valves as well as the operation instruction **CANopen** protocol eg. **Profibus DP** protocol with device profile DSP-408 for «DSV».

CONNECTOR WIRING DIAGRAM
Analog interface:
Device receptacle (male) X1


- 1 = Supply voltage +
- 2 = Supply voltage 0 VDC
- 3 = Stabilised output voltage
- 4 = Preset value voltage +
- 5 = Preset value voltage -
- 6 = Preset value current +
- 7 = Preset value current -
- 8 = Reserved for extensions
- 9 = Reserved for extensions
- 10 = Enable control (Digital input)
- 11 = Error signal (Digital output)
- 12 = Chassis

Preset value voltage (PIN 4/5) resp. current (PIN 6/7) are selected with set-up and diagnosis software.
 Factory setting: Voltage (0...+10 V), (PIN 4/5)

Fieldbus interface:
Device receptacle supply (male) X1


MAIN

- 1 = Supply voltage +
- 2 = Reserved for extensions
- 3 = Supply voltage 0 VDC
- 4 = Chassis

Device receptacle CANopen (male) X3

CAN

- 1 = not connected
- 2 = not connected
- 3 = CAN Gnd
- 4 = CAN High
- 5 = CAN Low

Device receptacle Profibus (female) X3

PROFIBUS

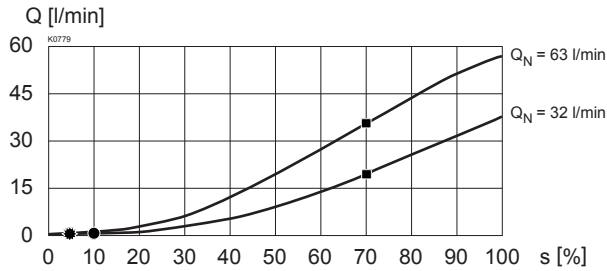
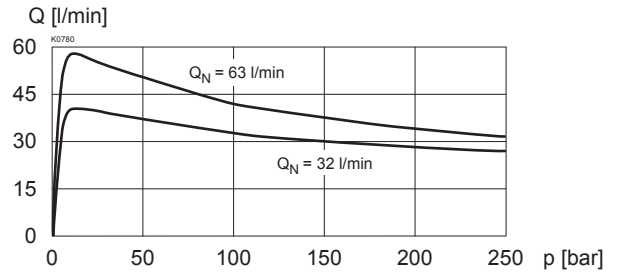
- 1 = VP
- 2 = Rx/D/TxD - N
- 3 = DGND
- 4 = Rx/D/TxD - P
- 5 = Shield

Parameterisation interface (USB, Mini B) X2

Under the closing screw of the housing cover

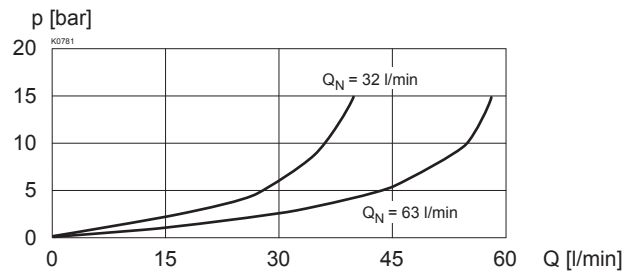

NOTE!

The mating connectors and the cable to adjust the settings are not part of the delivery. To order the cable, look up the article no. in the chapter «Accessories».

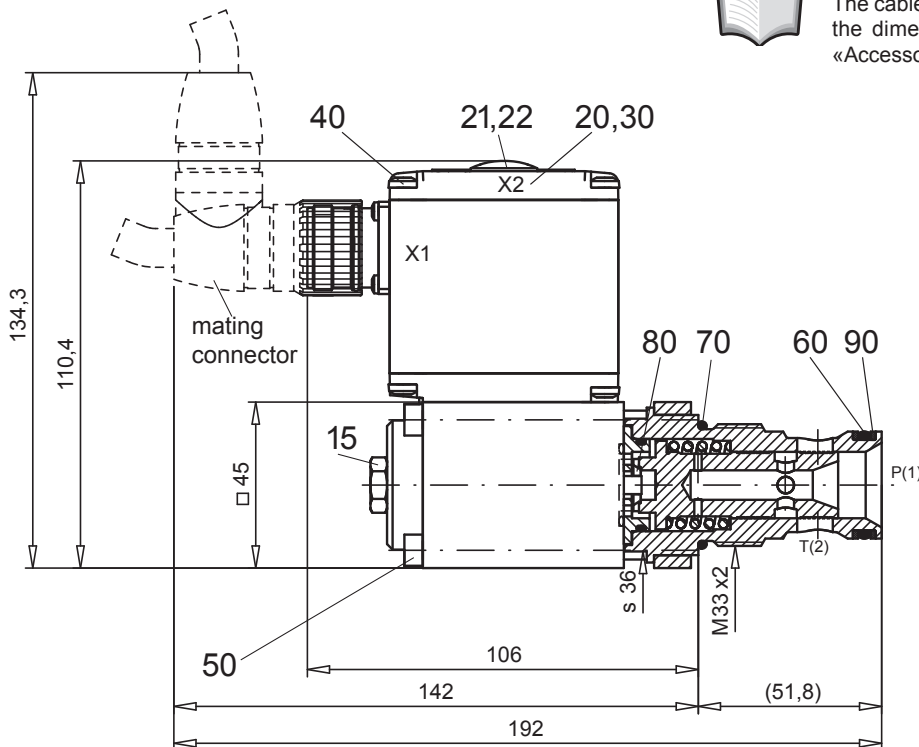
CHARACTERISTICS oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$
Q = f (s) Volume flow adjustment characteristics ($\Delta p = 20 \text{ bar}$)
 (s corresponds to preset value signal)

Q = f (p) Volume flow pressure characteristics
 (Preset value signal = 100%)

Factory settings:

Dither set for optimal hysteresis

- = Deadband: Solenoid switched off with command preset value signal <5%
- = Opening point: at command signal 10%
- = Flow at $\Delta p = 20 \text{ bar}$ at command signal $\pm 70\%$
 36 l/min for $Q_N = 63 \text{ l/min}$
 20 l/min for $Q_N = 32 \text{ l/min}$

 $\Delta p = f (Q)$ Pressure drop volume flow characteristics
 (Preset value signal = 100%)

DIMENSIONS/SECTIONAL DRAWINGS

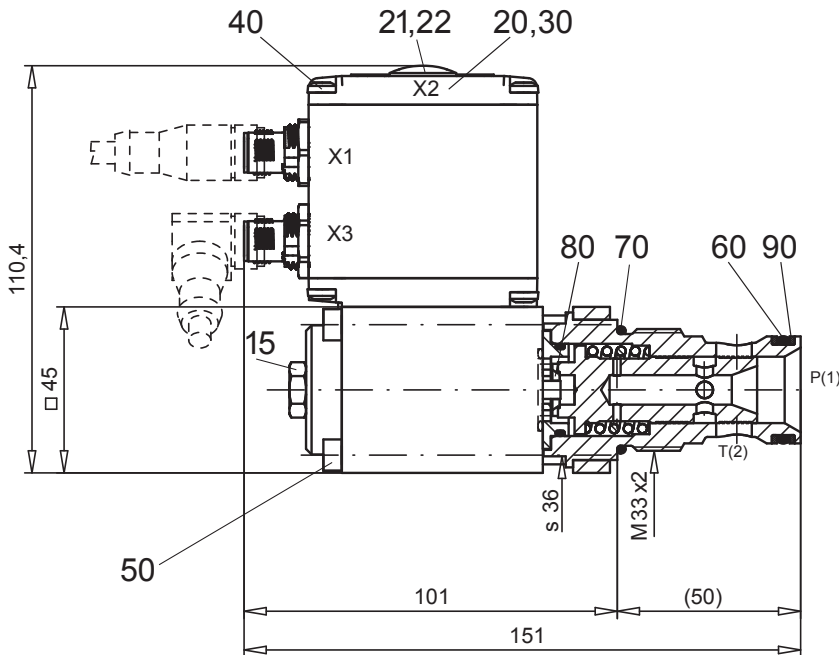
With analog interface


NOTE!


The cable connector is not part of the delivery. Regarding the dimensions see also the connector in the chapter «Accessories».

DIMENSIONS / SECTIONAL DRAWINGS

With fieldbus interface



Cavity drawing according to ISO 7789-33-01-0-98



For detailed cavity drawing and cavity tools see data sheet 2.13-1005.

PARTS LIST

Position	Article	Description
15	253.8001	Mounted screw with integrated manual override HB6
20	062.0102	Cover
21	223.1317	Dummy plug M16 x1,5
22	160.6131	O-ring ID 13,00 x1,5
30	072.0021	Gasket 33x2x59,9x2
40	208.0100	Socket head cap screw M4x10
50	246.2171	Socket head cap screw M5x70 DIN 912
60	160.2238	O-ring ID 23,81x2,62
70	160.2298	O-ring ID 29,82x2,62
80	160.2188	O-ring ID 18,77x1,78
90	049.3297	Back up ring RD 24,5x29x1,4

ACCESSORIES

- Cartridge built-in:
 - flange and sandwich bodies see register 2.6
 - Set-up software see start-up
 - Cable to adjust the settings through interface USB (from plug type A to Mini B, 3 m) article no. 219.2896
 - Cable connector for analog interface:
 - straight, soldering contact article no. 219.2330
 - 90°, soldering contact article no. 219.2331
- Recommended cable size:**
- Outer diameter 9...10,5 mm
 - Single wire max. 1 mm²
 - Recommended wire size:
 - 0...25 m = 0,75 mm² (AWG18)
 - 25...50 m = 1 mm² (AWG17)

Technical explanation see data sheet 1.0-100E